#### OUTDOOR LIGHTING



## in-lite<sup>®</sup>

make your outdoor space unique.

#### ENHANCES EVERYTHING OUTDOORS

## THE NICEST PLACE IN YOUR HOME IS THE GARDEN

Until night falls and all the joy it brings simply disappears. Outdoor lighting from in-lite lets you discover how your garden can really come to life after dark. Lighting makes your lovely garden a magical place. Your eye is drawn to the elements that are illuminated: an amazing tree, a wonderful lounging area or a colourful border. While everything blends together during the daytime, lighting lets you create personal accents and your own magical place after dark. We think everyone should experience this for themselves.

For around 25 years now in-lite has been developing the perfect light for outdoor spaces. This has resulted in some of the most true-to-life lighting available on the market. The system operates on a low voltage, making it easy and safe for anyone to install. The fixtures are fitted with high-quality LEDs, which translates into low energy consumption and light that is as natural and inviting as possible.

Everything from the tallest tree to the smallest plant can be attractively illuminated with in-lite products. And the in-lite app lets you easily switch your lighting on and off, resulting in maximum convenience and complete control. Both coloured lighting and dimming are possible, and you can create new effects, contrasts and different colour combinations. In no time at all, you can transform your outdoor space into a magical place that can be enjoyed into the small hours, with in-lite enhancing everything outdoors.



# CONTE

CONCEPTS	
SWAY	12
ACE	74
EVO	16
INNOVATION	18

PRODUCTS	
recessed lights	20
outdoor spots	36
line light	48
bollards	54
wall lights	66
ceiling lights	80
PARTNERS	88
SYSTEM	90



# SMART LIGHTING SMART SMART TONE PRODUCTS

PAGE 28 | 42 | 52



preview NEW IN 2024



# MORE THANA BRAND

in-lite is more than just an outdoor lighting brand. We're a company with a mission. This is done by developing beautiful outdoor lighting fixtures but above all by inspiring as many people as possible and showing that lighting belongs in every outdoor space. But that's not all we do. An extensive network of partners and landscapers have the exact same mission. We train these professionals in the in-lite Playground and inspire them with unique ways to use lighting. Together we make any outdoor space a unique place that you can fully enjoy well into the evening hours.



#### **EASY TO INSTALL**

Smart low voltage system Safe for people and animals 100% waterproof system



#### THE PERFECT LIGHT


Atmospheric CRI 90+ light Smart adjustable RGB light Sustainable and energy efficient



The best materials & LEDs European design 5 years warranty



SMART in-lite app Focus on simplicity Leading and innovative

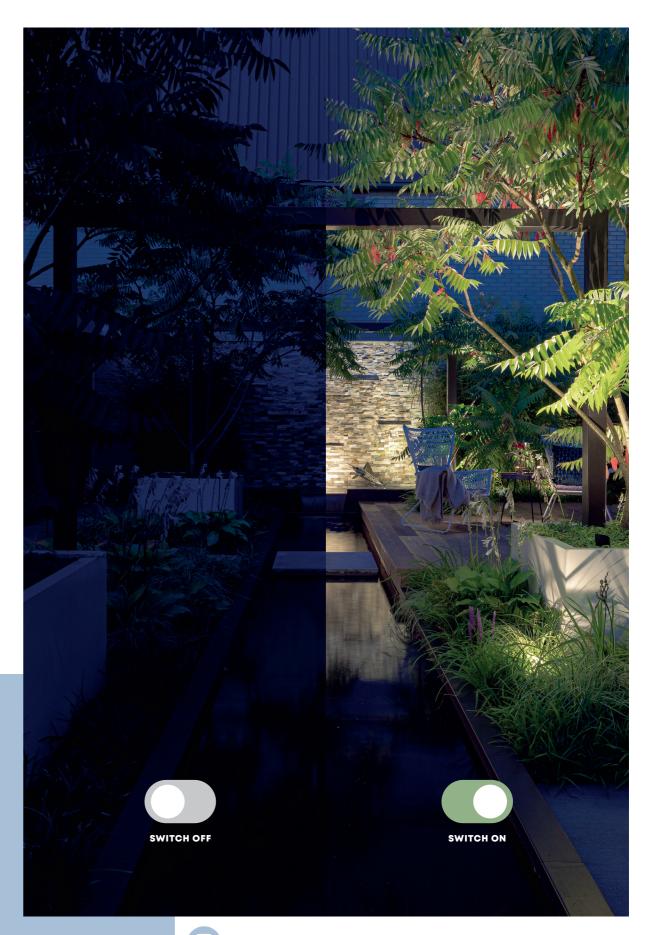

You can also follow us at @inlite\_global





#### INNOVATION

# SMART LIGHTING


At its core, in-lite's Smart system comprises a SMART HUB and the in-lite app. The smart transformer enables you to connect up any fixture from in-lite's range and control each line using a Bluetooth Low Energy connection. Next add (individually controllable) Smart lights, such as SMART SCOPE TONE, SMART FLUX TONE and SMART EVO FLEX TONE. Thus transforming your garden into a colourful, elegant whole.

Ease of use is key to the in-lite app. Setting routines is straightforward and allows you to decide what time the lights will turn on and off. You can also add the SMART MOVE wireless motion detector or an accessory like the SMART BRIDGE. This enables you to integrate your Bluetooth system into your WiFi network, giving you control over your lighting anytime, anywhere. The in-lite Smart system can also be integrated into home automation systems such as Google Home, Apple HomeKit and Amazon Alexa.

Smart lighting is the future of our range. The in-lite app is continuously developing, enabling us to permanently offer Smart system users new options and optimisations such as in-lite Scenes and in-lite Energy Insight – a bespoke sustainability plan for your garden.

Keen to find out more about in-lite Smart and be kept informed of all developments? Scan the QR code.








## CREATING GARDENS IN PHASES

The unique in-lite system makes it possible to expand your lighting step by step. You start by installing a sufficient number of cables in the garden and over time, you simply add new fixtures as desired. Your dream garden will be a reality in no time!







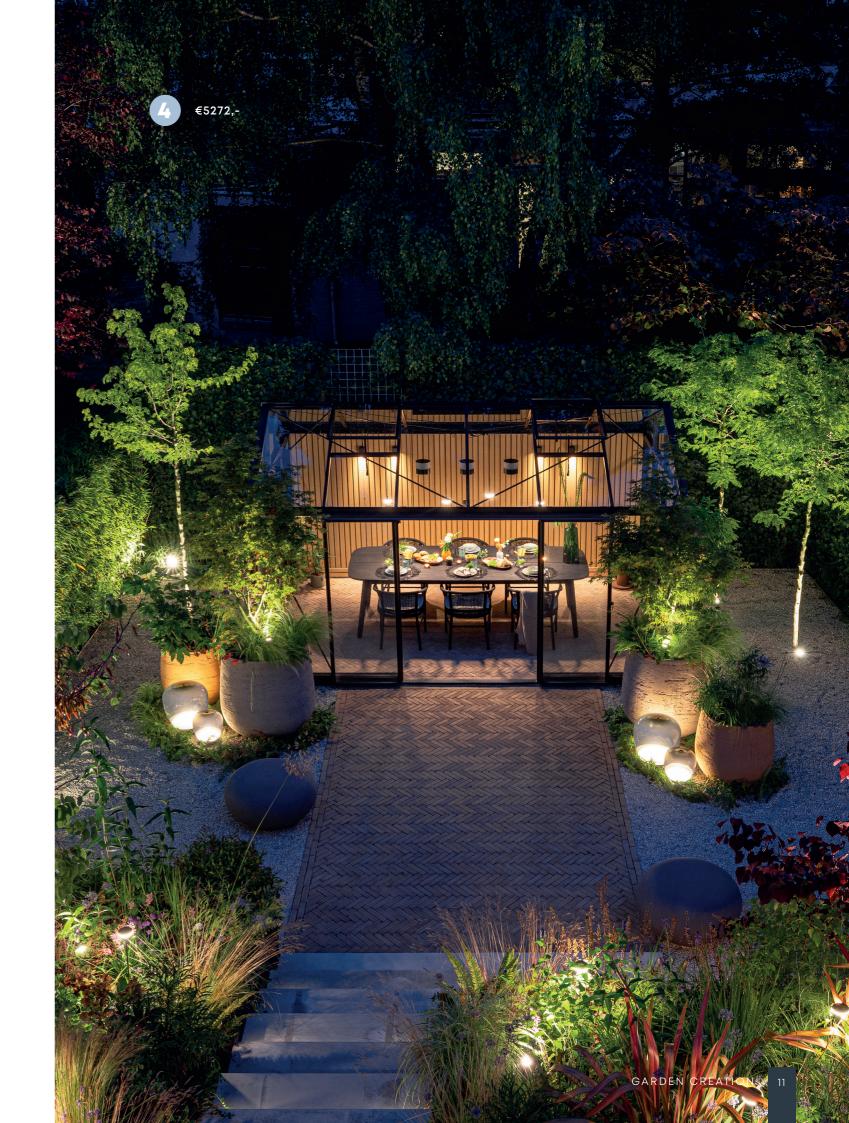

### IN-LITE CONCEPT

# SWAY

### ONE WITH NATURE

The concept encompasses bollards, wall lights, hanging lights in two different colours (Black and Pearl Grey) and a table light. The idea underlying the design is that a fixture can be in harmony with the garden and hence does not always need to stand out. The minimalistic design gives rise to an elegant, friendly appearance that is very contemporary.









IN-LITE CONCEPT 



p. 68





## PERFECT SPACE

The concept encompasses bollards and wall lights in four different colours: Dark Grey, White, Rosé Silver and Corten. Anyone can benefit from this concept. The design is minimalistic and the light produces distinctively sleek illumination.









p. 32

#### **BY IN-LITE**

in-lite designs and produces all its products itself. Throughout the design process we examine the options in the garden and what lighting solution is required to provide perfect illumination. Moreover, our fundamental principle is to keep our products as simple as possible. And simple products call for innovative ideas.

#### MODULAR DESIGN

Various fixtures and concepts in the in-lite range have a modular structure. This approach ensures that you have maximum freedom and can put together your end product yourself. Combinations of product colour and fixture height are possible.

We take things one step further with AIM, our newest series of designer spots. Here, we have developed a patent-pending method that allows light sources to be literally stacked. Thus enabling you to decide for yourself whether you would like to use AIM with one, two or three light sources. Offering the user maximum flexibility and expandability.

#### human in-lite<sup>°</sup> dimming

in-lite Human Dimming allows you to dim fixtures manually without having to touch them. This technology features in various hanging lights and SWAY TABLE, the wireless table light.

#### in-lite motion

in-lite Motion stems from the need to be able to tilt a light source without having to open the fixture. Thus preventing moisture issues and preserving maximum functionality. This applies to BIG NERO. Placing a magnet on the light source enables you to tilt the light source and create your desired illumination yourself.



in-lite

PRODUCT GROUP

FUSION

HYVE

DB LED

LUNA

FLUX

NERO

EVO FLOOD

EVO GROUP



IP 67 Size ø60 mm Colour 



#### PUCK 22

Capacity	0,60 W
Installation value	0,60 VA
Colour temperature	2900 K
CRI	96
IP	67
Size	ø22 mm
Colour	





#### **FUSION 22**

Capacity	0,20 W
Installation value	0,20 VA
Colour temperature	2750 K
CRI	93
IP	67
Size	ø22 mm



#### **FUSION 22 STAINLESS STEEL**

Capacity	0,20 W
Installation value	0,20 VA
Colour temperature	2750 K
CRI	93
IP	67
Size	ø22 mm
Colour	

## FUSION

#### HYVE 22

Capacity	0,20 W
Installation value	0,20 VA
Colour temperature	3100 K
CRI	95
IP	67
Size	ø22 mm

#### HYVE 22 STAINLESS STEEL

Capacity
Installation value
Colour temperatur
CRI
IP
Size
Colour






#### HYVE

0,20 W 0,20 VA vre 3000 K 95 67 ø22 mm 


#### Capacity 0,80 W Installation value 0,80 VA Colour temperature 3000 K CRI 95 67 IP ø60 mm Size Colour

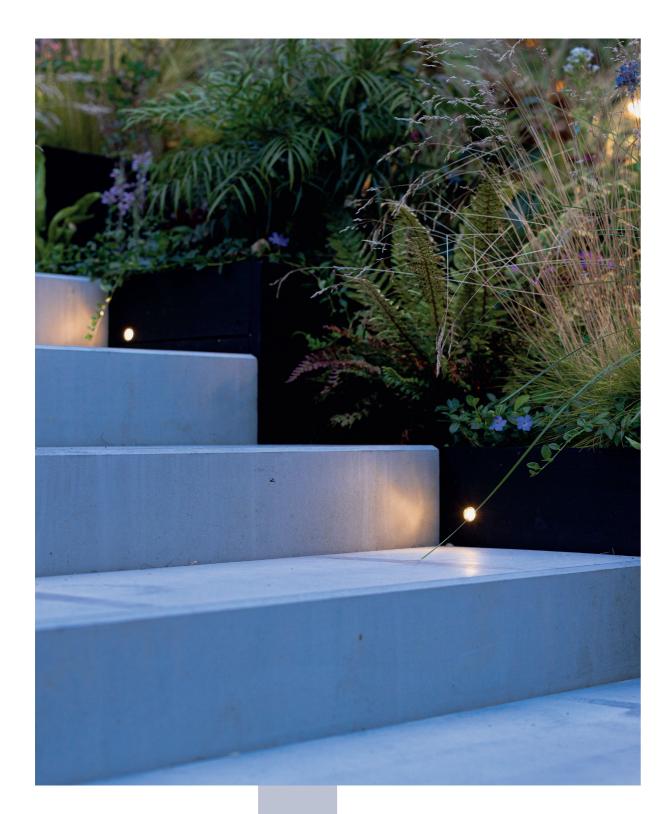

## DB LED (WW)

Capacity	0,50 W
Installation value	0,50 VA
Colour temperature	2850 K
CRI	94
IP	67
Size	ø22 mm



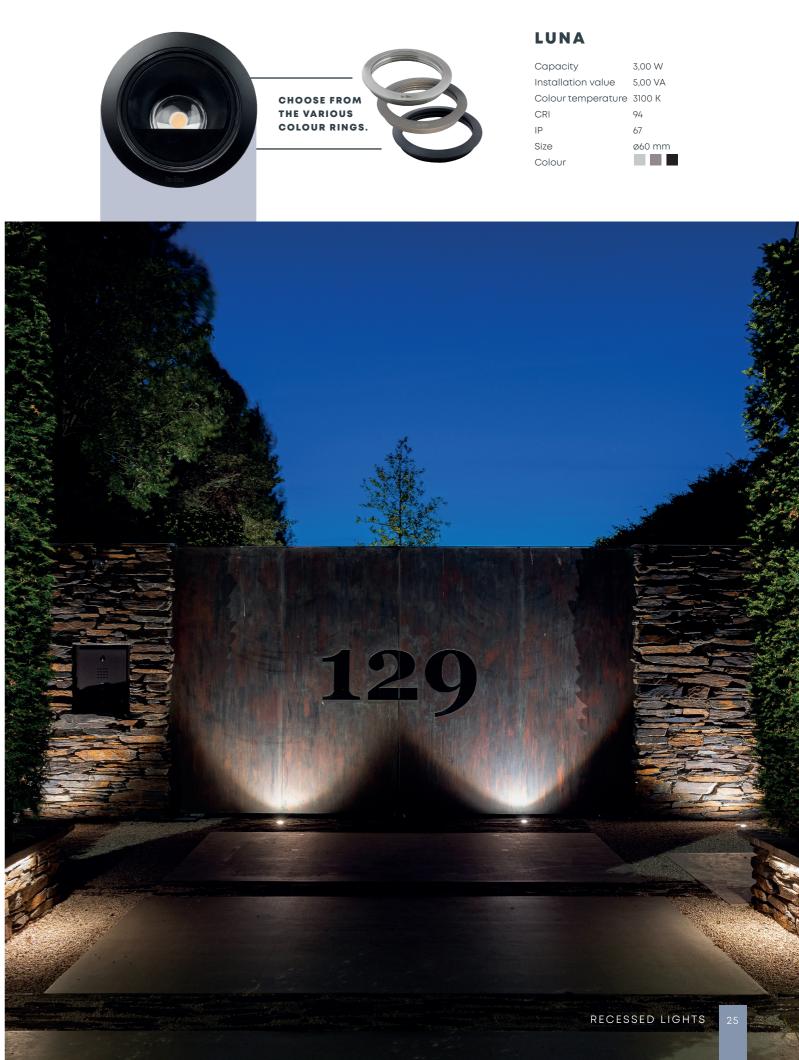



Capacity	3,00 W
Installation value	5,00 VA
Colour temperature	3100 K
CRI	94
IP	67
Size	ø60 mm
Colour	



#### FLUX

Capacity	1,50 W
Installation value	2,50 VA
Colour temperature	3000 K
CRI	92
IP	67
Size	ø60 mm
Colour	



INCORPORATING INTO GRASS, SAND OR GRAVEL? Use accessory SPIKE.



## **BIG FLUX**

Capacity	3,00 W
Installation value	4,20 VA
Colour temperature	3100 K
CRI	93
IP	68
Size	ø60 m
Colour	


Capacity	3,00 W
Installation value	4,20 VA
Colour temperature	3100 K
CRI	93
IP	68
Size	ø60 mm
Colour	

**BIG FLUX** 

ASYMMETRIC

3,00 W

ø60 mm

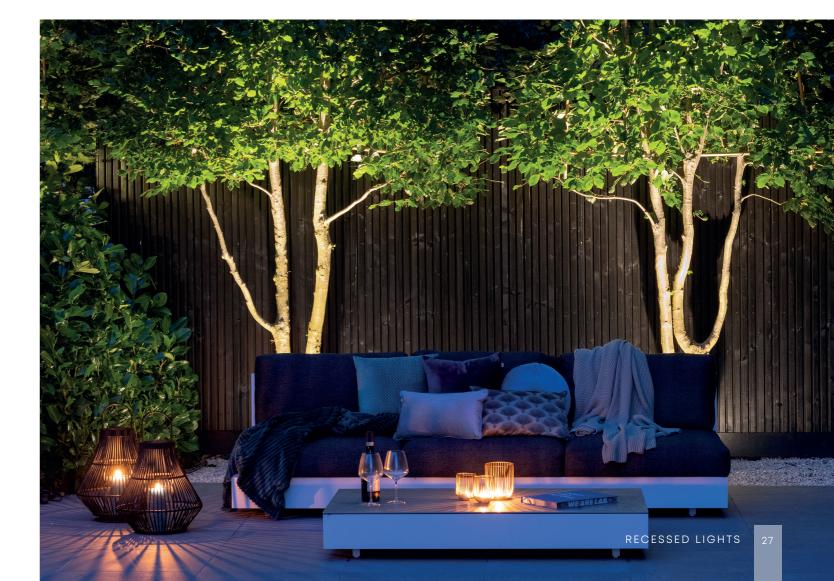



#### **BIG FLUX** NARROW

Capacity 3,00 W Installation value 4,20 VA Colour temperature 3100 K CRI 93 68 IP Size ø60 mm Colour

## SMART ELUX EUX EUX EUX

#### **SMART FLUX TONE**

is the first ground spot in the Tone line, making it a great addition to the Smart collection. This ground spot combines well with the other smart lighting and the settings are easily adjusted using the in-lite app.






#### **SMART FLUX TONE**

Capacity	,
Installation value	,
Colour temperature	
IP	
Size	
Colour	

6,00 W
9,5 VA
3100 K
67
ø60 mm

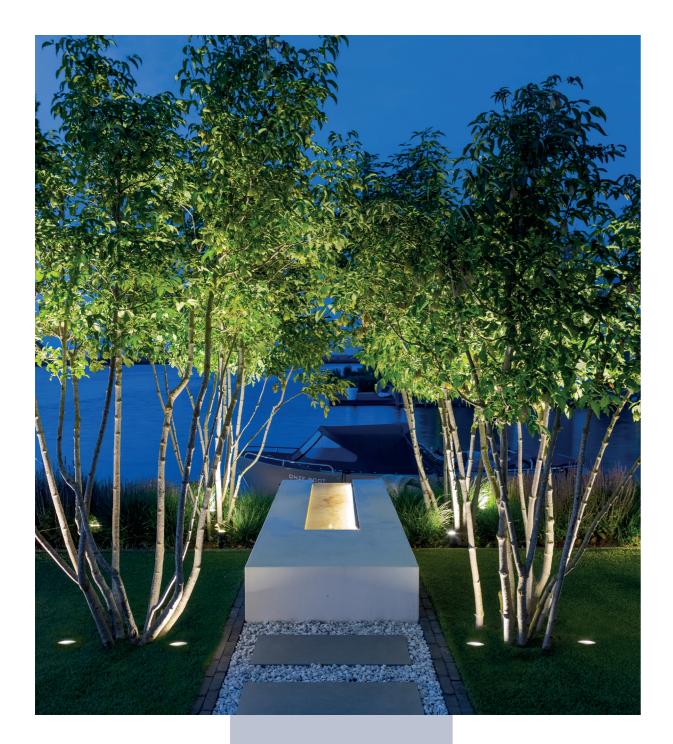

#### NERO

Capacity	3,00 W
Installation value	4,70 VA
Colour temperature	3100 K
CRI	91
IP	67
Size	ø116 mm





### **BIG NERO**


in-lite motion	
Size	ø142 mm
IP	67
CRI	90
Colour temperature	3100 K
Installation value	11,90 VA
Capacity	7,50 W





#### **BIG NERO NARROW**

in-lite	motion	
Size		ø142 mm
IP		67
CRI		91
Colour ten	nperature	3100 K
Installation value		11,90 VA
Capacity		7,50 W

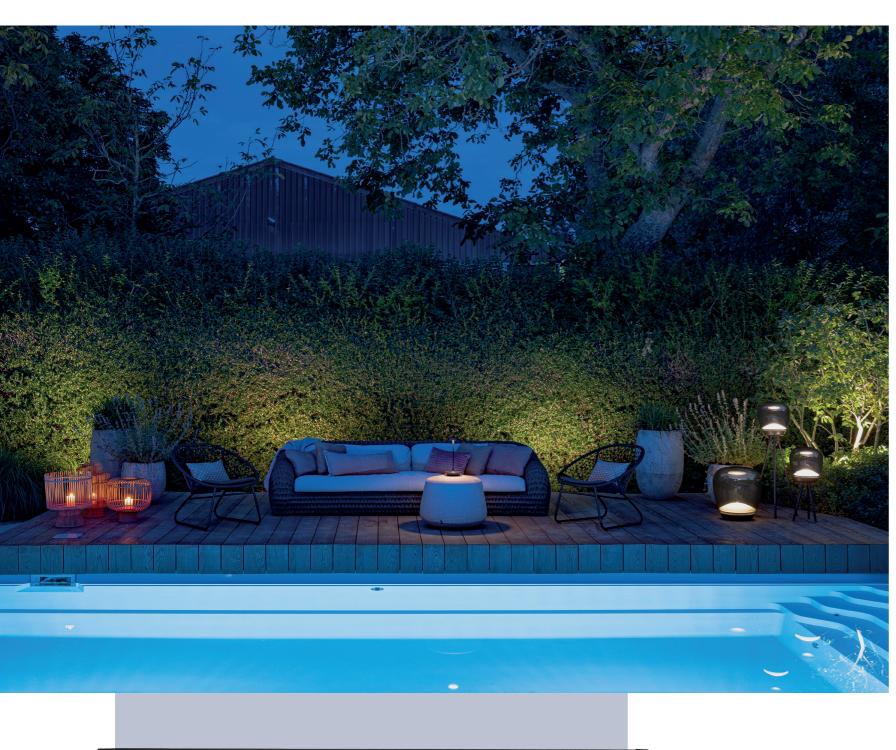

• EVO GROUND 300

Capacity	1,00 W
Installation value	1,00 VA
Colour temperature	3000 K
CRI	95
IP	67
Length	300 mm
Colour	





#### EVO FLOOD

Capacity	5 W
Installation value	8 VA
Colour temperature	2800 K
CRI	97
Length	438 mm
Colour	



## **RECESSED** LIGHT

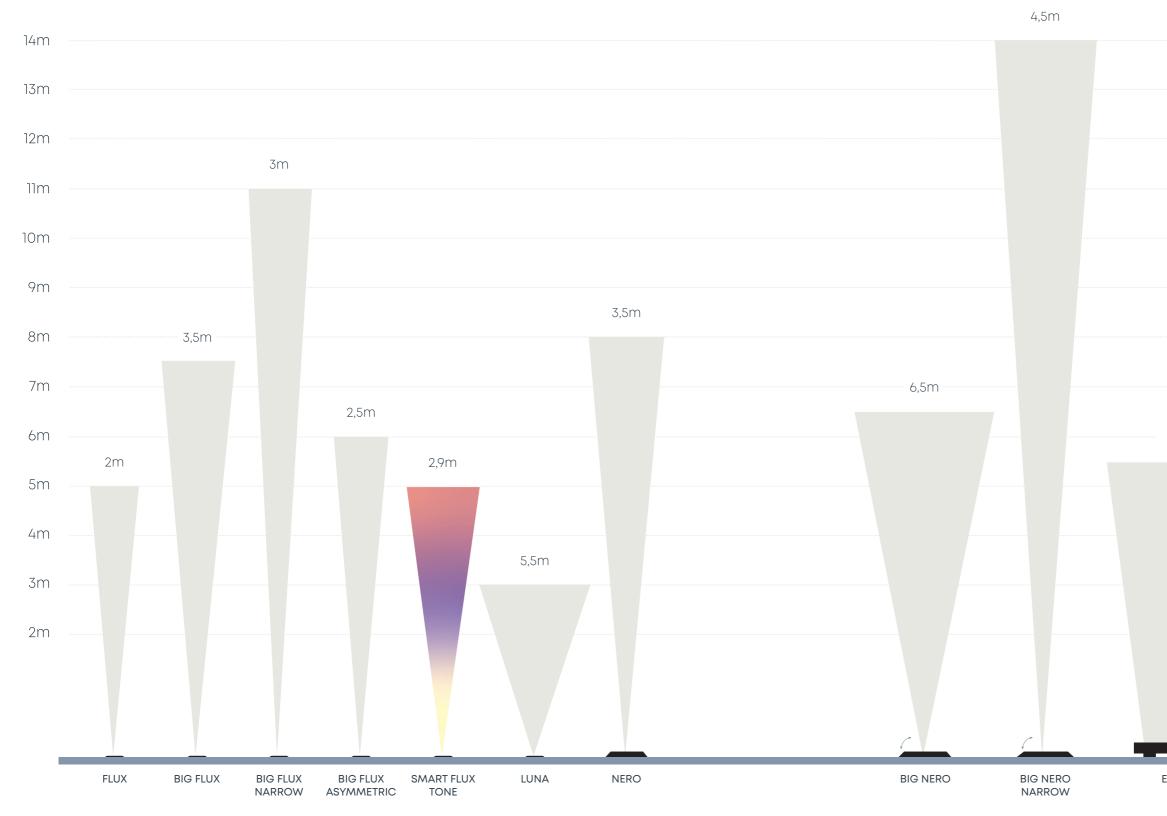

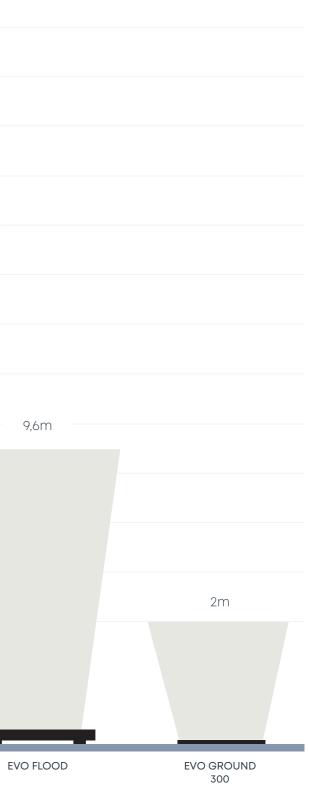

PRODUCT GROUP

# COLDOO RUUS S DOJS

AIM

MICRO SCOPE Light intensity Light intensity SCOPE

Light intensity fits
 BIG SCOPE
 Light intensity, hig

SMART SCOPE TONE

MINI SCOPE DUO

SUB



#### AIM

Capacity	1,20 W
Installation value	2,10 VA
Colour temperature	3000 K
CRI	95
IP	67
Height	160 mm   400 mm   800 mm

 $^{\ast}\mbox{Can}$  be put together with individual light sources.



#### MICRO SCOPE


Capacity	0,60 W
Installation value	1,10 VA
Colour temperature	2900 K
CRI	91
IP	67
Height	165mm





#### MINI SCOPE

Capacity	1,00 \
Installation value	2,00
Colour temperature	2900
CRI	93
IP	67
Height	215m

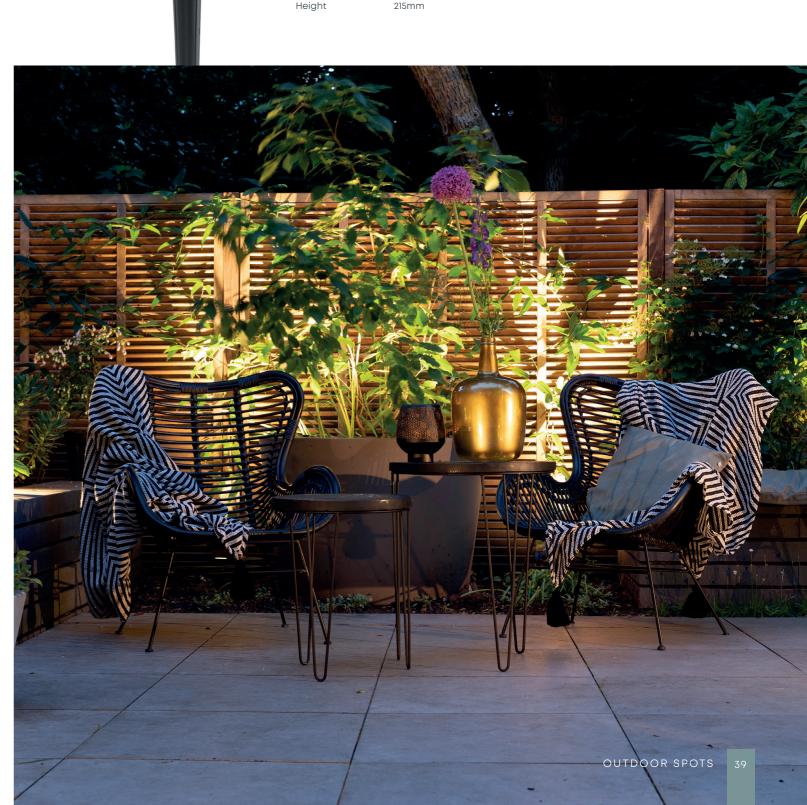

W VA O K

n

Combine various SCOPE fixtures for lighting different heights and shapes. Use SCOPE for medium-sized trees, BIG SCOPE for wide, multistemmed trees and BIG SCOPE NARROW for the tallest treetops.



#### SCOPE

Capacity	3,00 W
Installation value	5,20 VA
Colour temperature	3100 K
CRI	91
IP	67
Height	256 mm



Capacity	5,20 W
Installation value	8,00 VA
Colour temperature	3100 K
CRI	91
IP	67
Height	267 mm



• • • • • • • • • • • • • • •



Capacity	5,00 W
Installation value	7,90 VA
Colour temperature	3100 K
CRI	92
IP	67
Height	267 mm

### INCORPORATING **BETWEEN PLANTS?**





# SMART SCOPE JONE

#### SMART SCOPE TONE

is easy to set using the in-lite app. Apart from choosing different colours the light intensity can also be adjusted.

#### **SMART SCOPE TONE**


Capacity6,00 WInstallation value9,50 VAColour temperature3100 KIP67Height267 mm

#### MINI SCOPE DUO

Capacity	2,00 W
Installation value	4,00 VA
Colour temperature	2900 K
CRI	93
IP	67
Height	800 mm





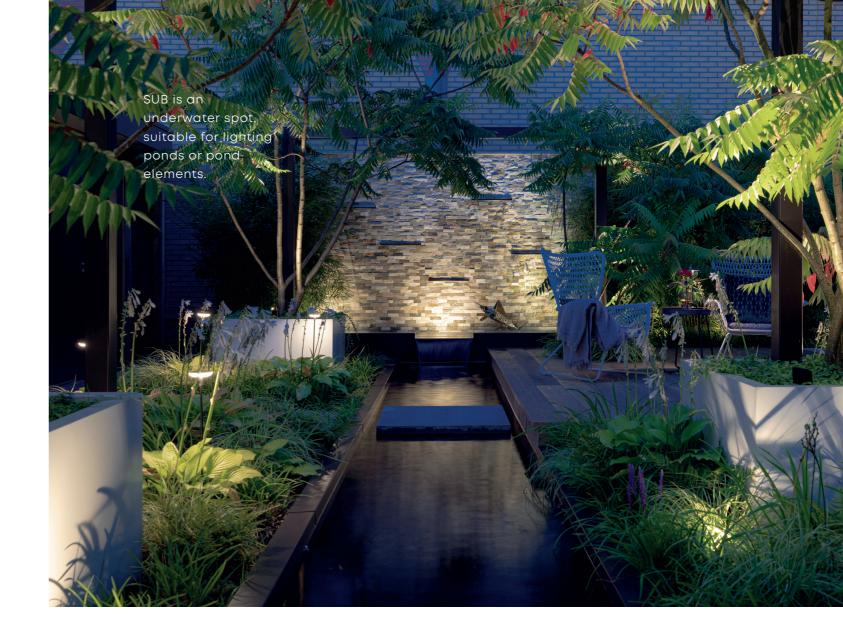





#### SUB

Capacity	3,00 W
Installation value	4,70 VA
Colour temperature	3000 K
CRI	93
IP	68
Height	150 mm

# OUTDOOR SPOT

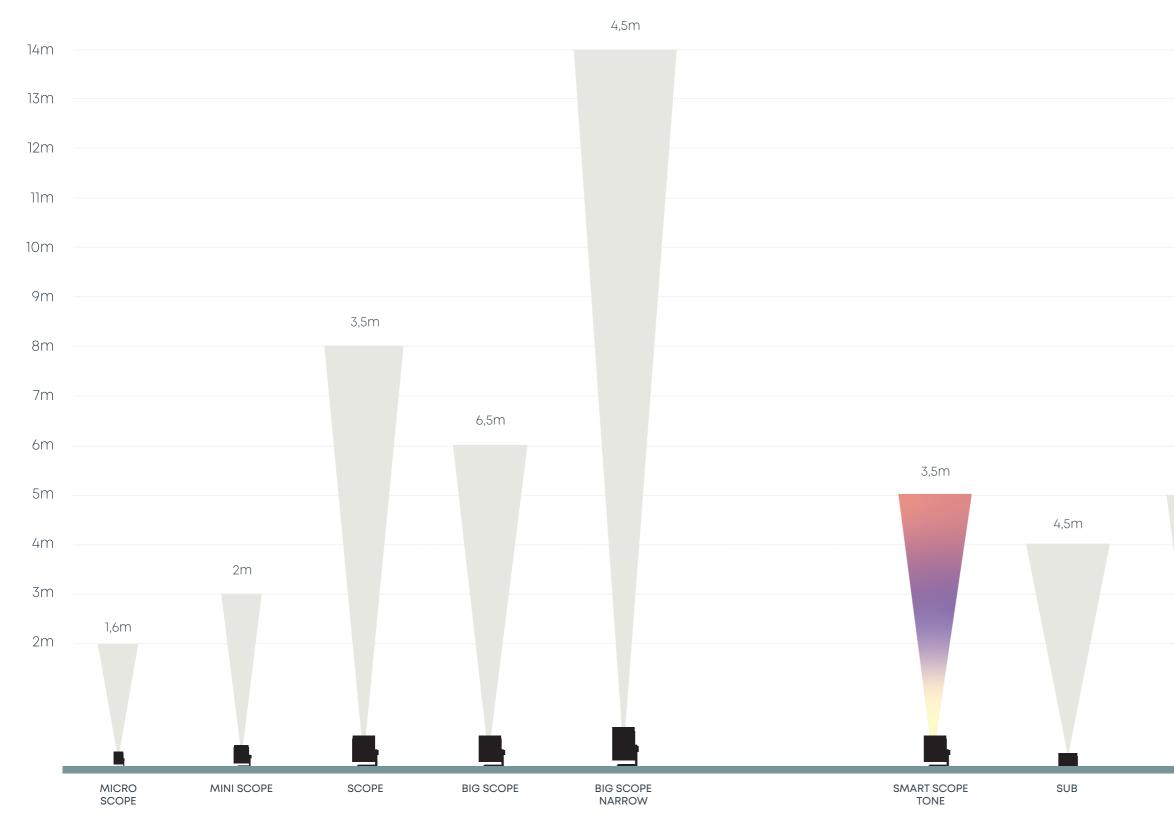

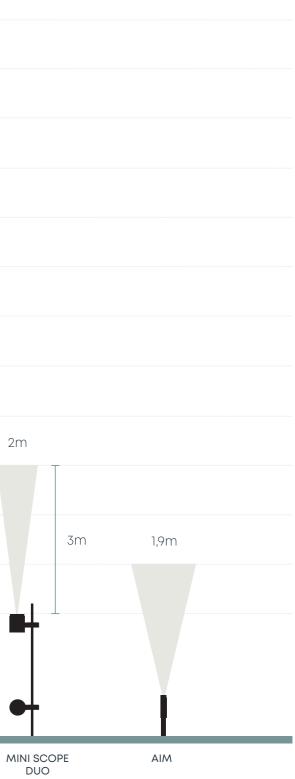

RODUC

# 

EVO HYDE


Light intensity: low

EVO FLEX

Light intensity: high

SMART EVO FLEX Light intensity: medium

**SMART EVO FLEX TONE** Light intensity: medium



## EVO HYDE 180


Capacity	0,
Installation value	0,
Colour temperature	29
CRI	95
IP	53
Length	18


0,50 W 0,60 VA 2950 K 95 53 80 mm

#### EVO HYDE 550

Capacity	2,00 W
Installation value	2,10 VA
Colour temperature	2950 K
CRI	93
IP	55
Length	550 mm



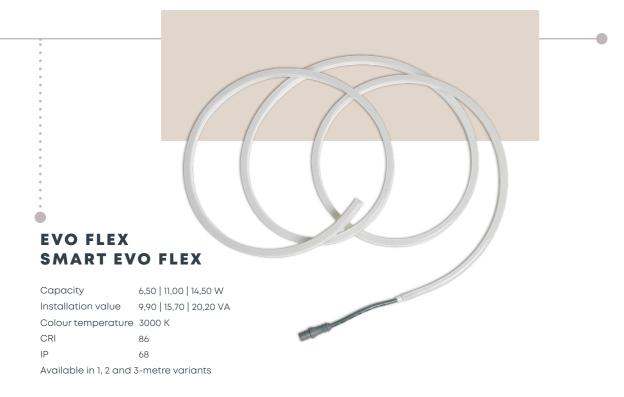

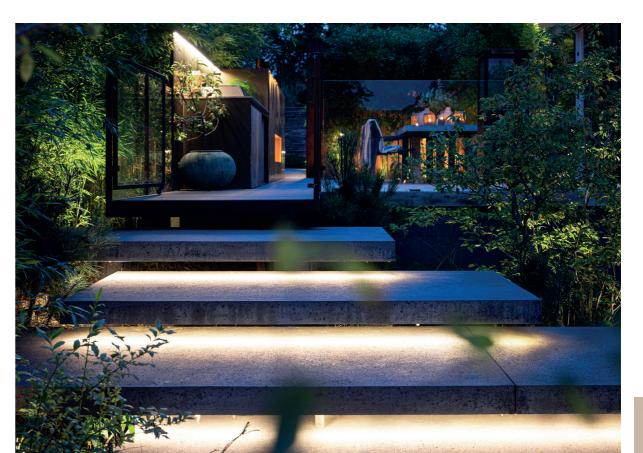

# SMART EVOFLEX TONE

#### SMART EVO FLEX TONE

This fixture produces perfectly even line lighting without any visible light points. Fitted with dimmable colours Available in 1, 2 and 5-metre variants.

#### **SMART EVO FLEX TONE**

 Capacity
 2,50 | 4,50 | 10,00 W

 Installation value
 4,50 | 7,50 | 14,50 VA

 Colour temperature
 3100 K

 CRI
 95

 IP
 68

 Available in 1, 2 and 5-metre variants

## PRODUCT GROUP BOLLARDS

SWAY TA	ABLE
-	- Light intensity
SWAY	- The second sec
	- Light intensity
ACE	
	- Light intensity
LIV	
-	- Light intensity
DISC	
	- Light intensity
EVO	
-	- Light intensity
VOQUE	



#### SWAY TABLE

Capacity	1,80 W
Installation value	1,80 VA
Colour temperature	2900 K
CRI	96
IP	55
Height	345 mm

in-lite | human dimming

#### MINI SWAY SWAY

Capacity	0,50 W   1,00 W
Installation value	0,60 V   1,00 V
Colour temperature	2900 K
CRI	95
IP	55
Colour	
Height	35 cm   60 cm   100 cm







#### ACE ACE HIGH

Capacity	3,
Installation value	5,
Colour temperature	3(
CRI	94
IP	5
Colour	
Height	20






3,00 W 5,30 VA 3000 K 94 55 205 mm | 490 mm





#### DISC LOW DISC

apacity	3,00 W
stallation value	4,90 VA
olour temperature	2900 K
RI	98
•	55
olour	
eight	350 mm   600 mm

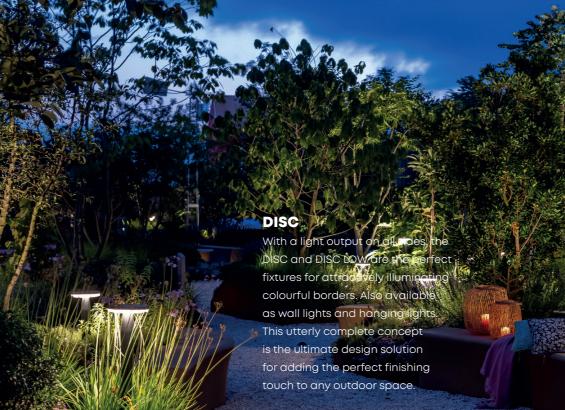




#### LIV LOW LIV

Capacity	1,50 W
Installation value	2,50 VA
Colour temperature	2900 K
CRI	95
IP	55
Colour	
Height	372 mm   612 mn



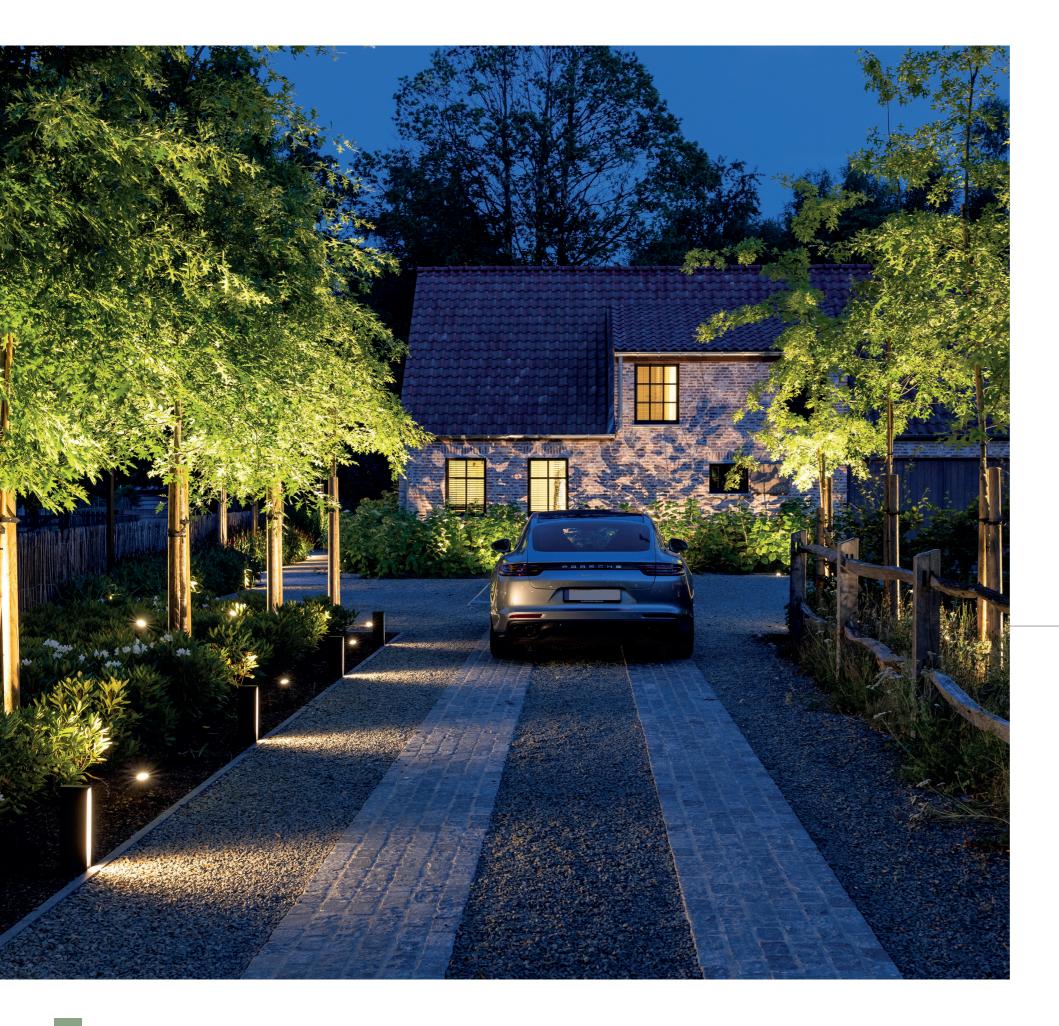

## EVO **EVO LOW**

Capacity Installation value 2,10 VA Colour temperature 2950 K CRI 95 IP 55 Colour Height




366 mm | 606 mm



Capacity	3,00 W   5,00 W
Installation value	5,20 VA   8,00 VA
Colour temperature	2750 K
CRI	89
IP	55
Size	ø300   ø450 mm




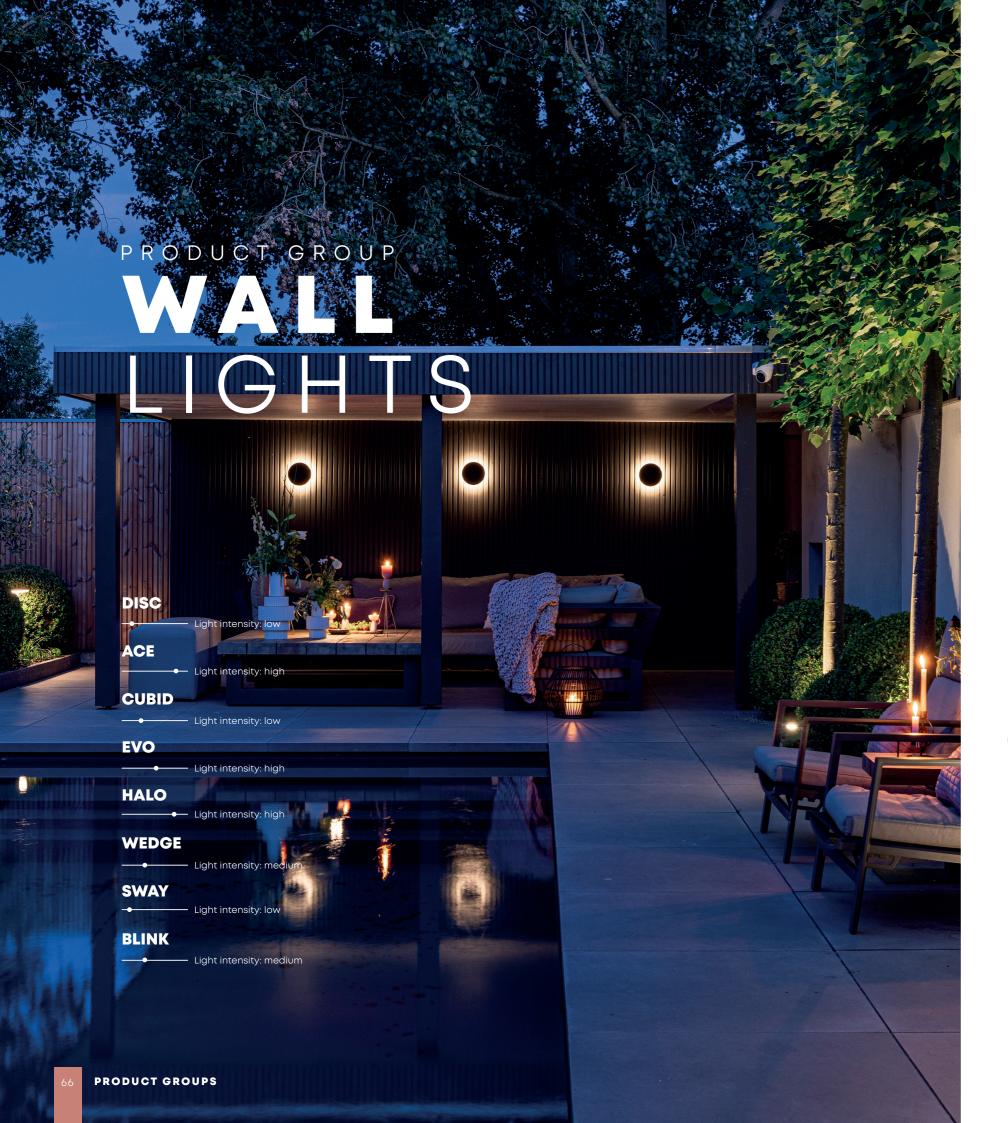



#### DISC WALL


Capacity	3,00 W
Installation value	4,90 VA
Colour temperature	2900 K
CRI	98
IP	55
Colour	
Size	ø200 mm



#### DISC WALL 100-230V

Capacity	4,50 W
Installation value	4,70 VA
Colour temperature	2900 K
CRI	98
IP	55
Colour	
Size	ø200 mm

\*This fixture is dimmable

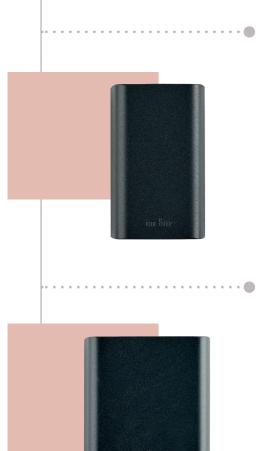


### ACE DOWN

Capacity3,00 WInstallation value5,30 VAColour temperature3000 KCRI91IP55ColourIn the set of t

### ACE DOWN 100-230V

Capacity 4,50 W Installation value 11,80 VA Colour temperature 3000 K CRI 95 IP 55 Colour Height 100 mm

### ACE UP-DOWN





### ACE UP-DOWN 100-230V









### **EVO DOWN**

Capacity	2,00 W
Installation value	2,10 VA
Colour temperature	2950 K
CRI	95
IP	53
Colour	
Width	520 mm



### CUBID


Capacity	0,60 W
Installation value	0,60 VA
Colour temperature	2800 K
CRI	93
IP	55
Colour	
Height	50 mm



### **BIG CUBID**

Capacity	1,00 W
Installation value	2,00 VA
Colour temperature	2900 K
CRI	93
IP	55
Colour	
Height	72 mm





Capacity	4,50 W
Installation value	11,50 VA
Colour temperature	3000 K
CRI	92
IP	55
Colour	
Height	300 mm

\*This fixture is dimmable





••••

### HALO DOWN

Capacity	3,00 W
nstallation value	5,00 VA
Colour temperature	3000 K
CRI	92
Ρ	55
Colour	
Height	100 mm

### HALO UP-DOWN

Capacity	6,50 W
Installation value	10,00 VA
Colour temperature	3000 K
CRI	92
IP	55
Colour	
Height	120 mm

### HALO DOWN 100-230V

Capacity	4,50 W
Installation value	11,50 VA
Colour temperature	3000 K
CRI	92
IP	55
Colour	
Height	100 mm

\*This fixture is dimmable




••••••

### HALO UP-DOWN 100-230V

Capacity	8,50 W
Installation value	20,00 VA
Colour temperature	3000 K
CRI	93
IP	55
Colour	
Height	100 mm

\*This fixture is dimmable

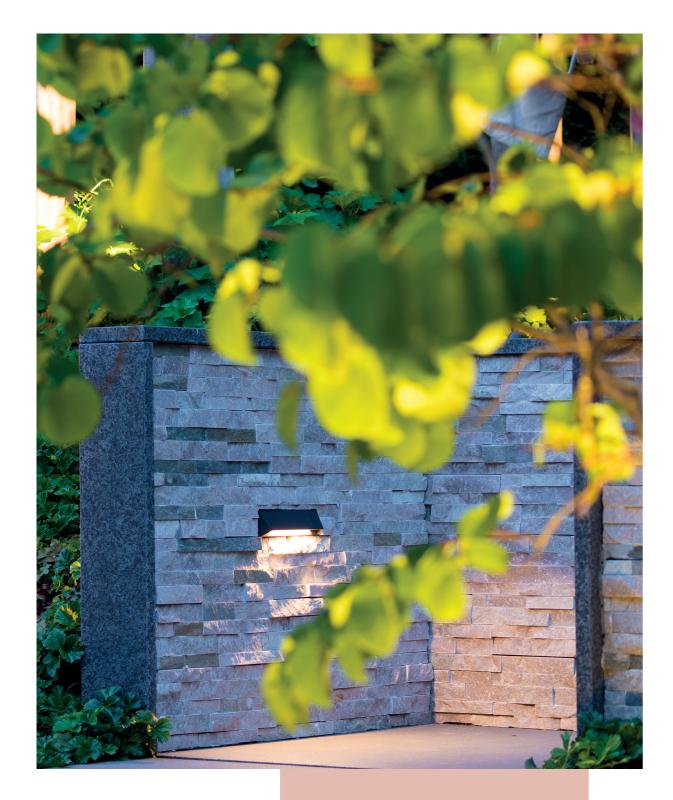

### WEDGE SLIM

Capacity	1,00 W
Installation value	1,00 VA
Colour temperature	2800 K
CRI	96
IP	55
Colour	
Width	200 mm




# <u>mbire</u>

### MINI WEDGE


Capacity	0,60 W
Installation value	0,60 VA
Colour temperature	2900 K
CRI	95
IP	55
Colour	
Width	60 mm





### WEDGE

Capacity	1,00 W
Installation value	1,60 VA
Colour temperature	2800 K
CRI	94
IP	55
Colour	
Width	100 mm

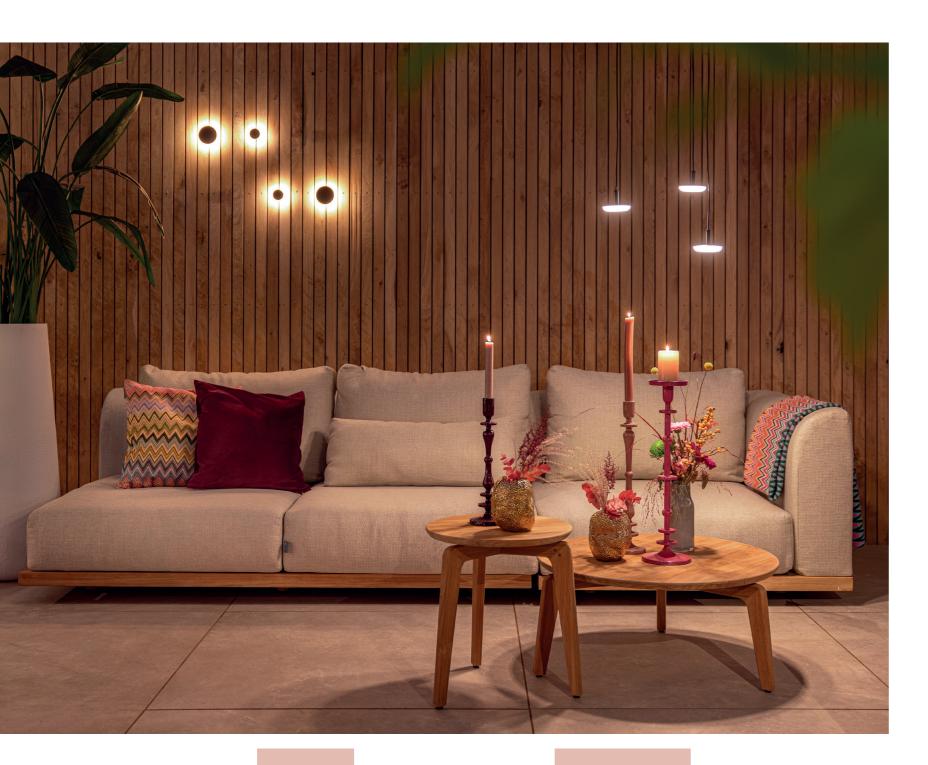

MINI SWAY WALL Capacity 0,50 W

Installation value0,60 VAColour temperature2900 KCRI96IP55Colour10Size050 mm



### SWAY WALL


Capacity1,00 WInstallation value1,00 VAColour temperature2900 KCRI95IP55Colour\$85 mm



-






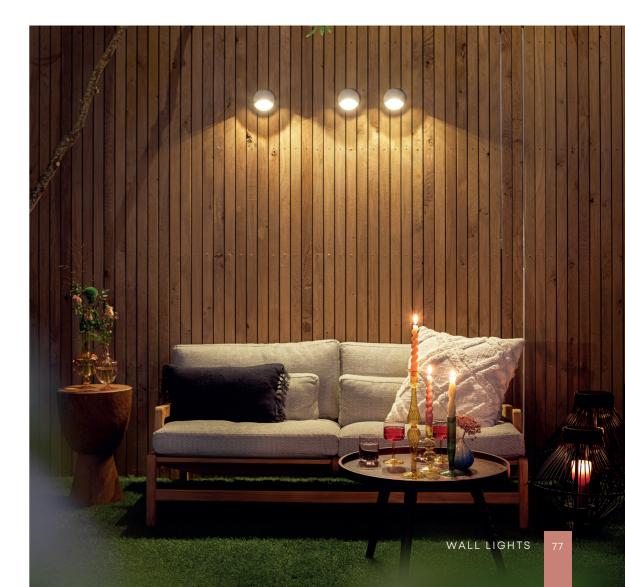



## WALL LIGHTS LIGHT

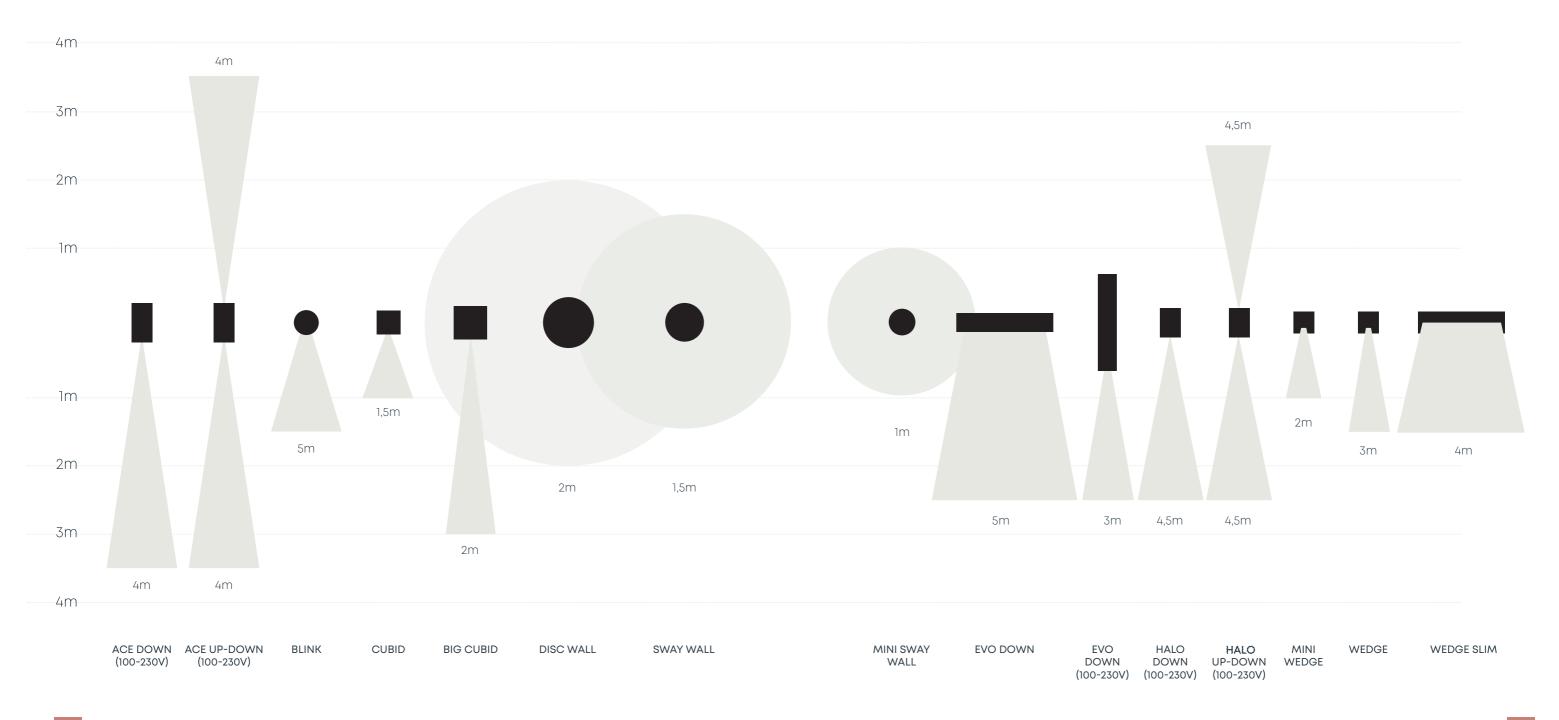

## PRODUCT GROUP CEELING IGHTS

1 Stanky

SCOPE CEILING

DISC PENDANT

SWAY PENDANT



### MINI SCOPE CEILING

Capacity	1,00 W
Installation value	2,00 VA
Colour temperature	2900 K
CRI	93
IP	67
Size	ø47 mm



### **SCOPE CEILING**

Capacity	3,00 W
Installation value	4,80 VA
Colour temperature	3100 K
CRI	91
IP	67
Size	ø66 mm





### **VOQUE PENDANT**

Capacity	3,00 W
Installation value	5,20 VA
Colour temperature	2750 K
CRI	89
IP	55
Size	ø300 mm
*Adjustable in length fro	om 55 to 98 cm



### AIM CEILING

Capacity	1,20 W
Installation value	2,10 VA
Colour temperature	2900 K
CRI	90
Height	85 mm



### **BIG VOQUE PENDANT**

Capacity	5,00 W
Installation value	8,00 VA
Colour temperature	2750 K
CRI	89
IP	55
Size	ø450 mm

\*Adjustable in length from 55 to 98 cm



### SWAY PENDANT

Capacity	0,90 W
Installation value	1,00 VA
Colour temperature	2900 K
CRI	96
IP	55
Colour	
Size	ø85 mm

### SWAY PENDANT 100-230V

Capacit	У	2,50 W
Installat	ion value	7,10 VA
Colour te	emperature	2900 K
CRI		96
IP		55
Colour		
Size		ø85 mm
in-lite	human dimmina	



Personalise the SWAY fixtures with inlite accessories specially developed to enable you to play with light. Any illumination you like can be created with these accessories.

SWAY PENDANT CAP






Capacity	3,00 W
Installation value	4,90 VA
Colour temperature	2900 K
CRI	98
IP	55
Colour	
Size	ø200 mm



### DISC PENDANT 100-230V

Capacity	4,50 W
Installation value	11,80 VA
Colour temperature	2900 K
CRI	98
IP	55
Colour	
Size	ø200 mm
in-lite   human	

## CREATING GARDENS IN PHASES

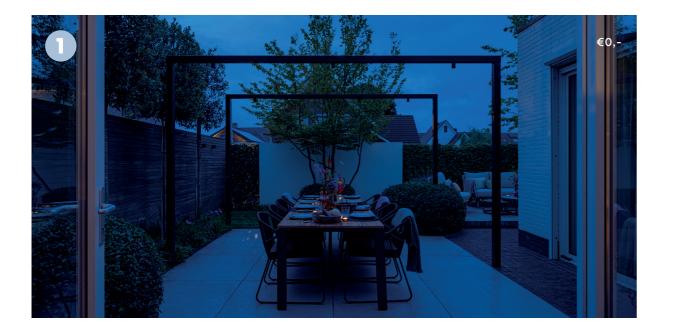



The unique in-lite system makes it possible to expand your lighting step by step. You start by installing a sufficient number of cables in




## IN-LITE X **PARTNERS**

Cooperation is a top priority for in-lite. Joining forces and creating unique gardens together. Anything to make outdoor living more appealing and more pleasurable. Somewhere to enjoy your garden in a different way each season.

For many years now, in-lite has had a solid partnership with MBI. MBI's GeoCeramica® is the ideal choice for high-quality, maintenance-free, easy-toinstall ceramic paving. Add integrated lighting from in-lite and you will be able to enjoy your garden night and day. Adezz's planters are in-lite-ready. CARREZ and CIRCUM are the first products of this unique collaboration. The planters come with a profile into which in-lite's SMART EVO FLEX LED strip can easily be embedded. Thus creating a single elegant unit that will add a unique dimension to your garden.

Last year saw in-lite and Big Green Egg team up to release a fixture together. It has been a success. And that's an understatement! Our renowned SWAY TABLE has been given a makeover. Are you a true Big Green Egg fan? Then hurry and add this to your collection.



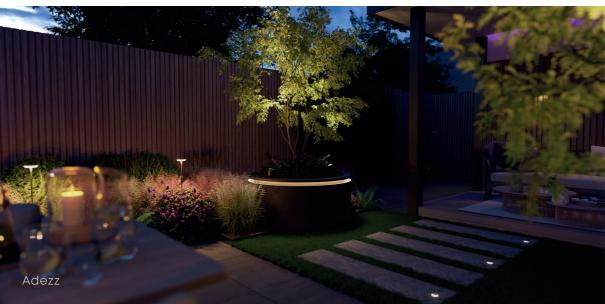





## 

0

ė



### HUB-50

A high-quality transformer with touch screen operation and maximum installation value of 50 VA, equipped with two lines that can be controlled jointly.

### **HUB-100**

A high-quality transformer with touch screen operation and maximum installation value of 100 VA, equipped with two lines that can be controlled jointly.

Maximum connection value	50 VA	10 OVA	150VA	300VA
Can be controlled using	Touch screen	Touch screen	Арр	Арр
Cable outlets	2	2	3	3
Lines can be controlled separately	×	×	~	~
Switching on/off	Touch screen	Touch screen	Button & App	Button & App
Connecting smart lighting	×	×	$\checkmark$	$\checkmark$
Works with SMART BRIDGE	×	×	$\checkmark$	~
Maximum cable length when using 10/2	80m	80m	80m	160m*

\*At max. load of 130VA per cable

\*\*The use of components not sourced from in-lite will void the right to warranty.

## •





### SMART **HUB-150**

SMART HUB-150 has an installation value of 150 VA and comes with three lines that can be controlled individually using the in-lite app.

### SMART **HUB-300**

SMART HUB-300 has an installation value of 300 VA and comes with three lines that can be controlled individually using the in-lite app.

### HUBS

HUB is a transformer that controls the garden lighting. A choice of four different hubs is available: HUB-50, HUB-100 and SMART HUB-150 and SMART HUB-300. Add up the VA value of your lighting to find out which transformer will suit your garden.

### 

The cable can be rolled out from the transformer and guided along the fixtures. There are two types of cables available: 14/2 and 10/2.

### CABLE SPLITTING

Want to split or branch a cable? Use a cable connector (CC-2) to split the cable plan in no time.

### EASY-LOCK

Every fixture comes with an EASY-LOCK. This is used to connect the fixture at any point along the main cable.

### ACCESSORIES

Is an in-lite fixture's cable too short? Simply use the extension cords. Another useful accessory is the splitter, which lets you connect two fixtures to one extension cord.

### CABLE ENDS

The cable can end anywhere in the garden and does not need to form a closed system. Seal off the end of the cable with the cover caps provided to ensure that no moisture can get in and that the cable ends do not come into contact with one another. Thus preventing short-circuiting.


1

2



### INSTALLATION INSTRUCTIONS

Install HUB at least 50 cm from the ground - away from precipitation - such as indoors, in a shed or under a canopy. If you do wish to site your HUB outdoors, always use a PROTECTOR. In the absence of a PROTECTOR the warranty will be invalidated.

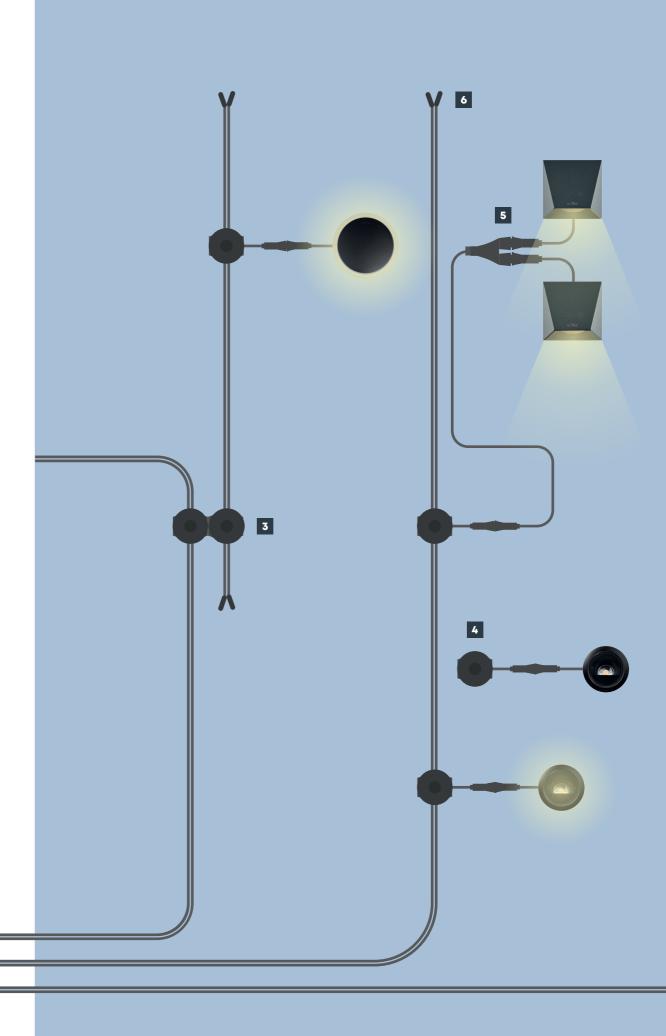

### ACCESSORIES FOR THE SYSTEM

Got a great lighting plan for your garden and worried that you won't be able to buy it all at once? Expanding your plan step by step is easy. You start by installing sufficient cabling in the garden and over time, you simply add new fixtures as desired. Your dream garden will be a reality in no time!

### **HUB PROTECTORS**

SMART HUB PROTECTOR has been developed to provide the refined technology in the SMART HUB-150 transformer with even better protection. This accessory will extend the lifespan of the product if it will not be possible to install the SMART HUB-150 somewhere covered. If you do install the transformer outside without a PROTECTOR, the warranty will be invalidated.



### SMART EXTENDER

This Smart product has been developed to improve the Bluetooth signal in and around your home. In some homes, external factors like thickly insulated walls and steel structures make Bluetooth connections suboptimal. The quality of the different Bluetooth receivers in smartphones currently in circulation varies widely too. SMART EXTENDER will improve your connection in such situations.



### SMART BRIDGE

SMART BRIDGE is an in-lite SMART system accessory that creates a bridge to the internet. The Internet connection makes it possible to integrate the in-lite SMART system into 'Smart Home' systems such as Google Home, Apple HomeKit and Amazon Alexa. The lighting can also be activated by means of voice commands, for instance. Simply connect your Smart Home system.



### **TOUCH DIMMER**

Keen to effortlessly adjust the intensity of your wall lights and hanging lights? Then discover the TOUCH DIMMER. This handy accessory will enable you to dim any outdoor light individually, with four different light settings to choose from. And best of all, you do not need a SMART system for the TOUCH DIMMER, making ease of use accessible.



### **MOTION DETECTORS**

Just like the SMART HUB, the wireless SMART MOVE can be controlled via Bluetooth connection using the in-lite app. The time for which the lighting stays on after motion is detected is adjustable by the minute from 1 to 60 minutes using the in-lite app.



## WELCOMEIN THE N-LITE PLAYGROUND

**Be inspired** by what in-lite can do to make your outdoor space unique. Enjoy the magic.



### CUSTOMER SERVICE EXTRAORDINARY

Please feel free to put any questions you may have about in-lite products, installation and warranty to our experiencedcustomer service team. They will be happy to help to ensure that you are able to enjoy your elegantly lit outdoor space each and every day. Looking for further inspiration? Then check out our social media channels and our website.

Telephone number: E-mail address: Chat function: Social Media:

+31 (0)184 688 7	760
customerserv	vice@in-lite.nl
www.in-lite.n	I
Instagram:	@inlite_glob
Facebook:	@inlitenl
Pinterest	@inlitegloba



Own a unique outdoor space and looking for advice? Our aim is to illuminate every outdoor space as uniquely, creatively and magically as possible. We design elegant lighting plans for the largest private gardens, terraces of hotels or restaurants and semi-public outdoor spaces. If an on-site lighting demo is required, LAB is the team to take care of this.

**EXPERIENCE IN-LITE AT OUR DEALERSHIPS** 

obal

balHQ



### INDEX

A ACE ACE DOWN ACE DOWN 100-230V ACE HIGH ACE UP-DOWN ACE UP-DOWN 100-230V	59 68 68 59 68 68
B BIG CUBID BIG FLUX BIG FLUX NARROW BIG FLUX ASYMMETRIC BIG NERO BIG NERO NARROW BIG SCOPE BIG SCOPE NARROW BLINK	70 27 27 31 31 41 41 77
<b>C</b> CUBID	70
D DB-LED (WW) DISC DISC LOW DISC PENDANT DISC PENDANT 100-230V DISC WALL DISC WALL 100-230V	24 60 65 85 67 67
E EVO EVO DOWN EVO DOWN 100-230V EVO FLEX EVO FLOOD EVO GROUND 300 EVO HYDE 180 EVO HYDE 550 EVO LOW	63 71 71 50 32 33 49 49 63
F FLUX FUSION FUSION 22 FUSION 22 RVS	26 22 22 22

H HALO DOWN HALO DOWN 100-230V HALO UP-DOWN HALO UP-DOWN 100-230V HUB-50 HUB-100 HYVE HYVE 22 HYVE 22 RVS	73 73 73 91 91 23 23 23
L LIV LIV LOW LUNA	61 61 25
M MINI SCOPE MINI SCOPE CEILING MINI SCOPE DUO MINI SWAY MINI SWAY WALL MINI WEDGE	39 81 44 56 76 75
N Nero	30
P PUCK PUCK 22	21 21
PUCK	
PUCK PUCK 22	21

This brochure is distributed free of charge through in-lite's dealership network. An up-to-date overview of our sales outlet locations can be found at in-lite.nl. No rights may be derived from the information provided in this publication. All specifications are subject to typesetting and printing errors. Colours may vary.

**Photography** Dion Doornik Roel van der Aa

**Design** Brand Creatives

Image editing MarkMyWork

99